
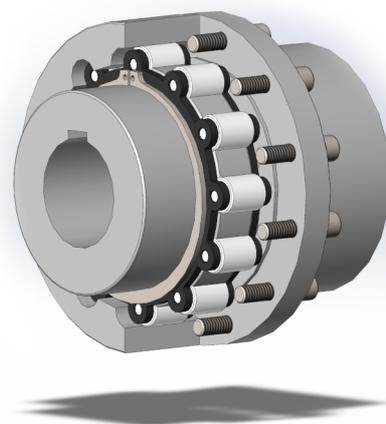


# Giunti a denti autolubrificanti BL

Scorrimenti assiali sotto coppia

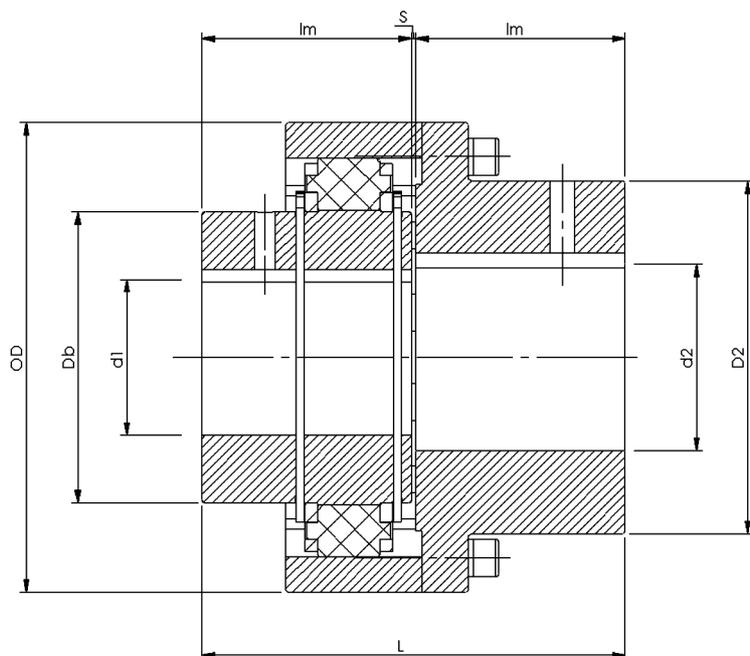

Elevato scorrimento con bassissima spinta assiale

Taglia	P' Poliammide''		B' Bronzo		BP' misto		Fori max		Dimensioni						rpm max
	Nm	kW/rpm	Nm	kW/rpm	Nm	kW/rpm	d1	d2	Dh	D1	D2	L	lm	S	
85	300	0,031	348	0,036	494	0,052	30	35	85	42	50	92	45	2	5000
105	500	0,052	580	0,061	824	0,086	42	45	105	60	65	102	50	2	4000
127	1000	0,105	1160	0,121	1647	0,172	53	60	127	75	85	123	60	3	3600
155	2000	0,209	2320	0,243	3294	0,345	66	70	155	95	110	143	70	3	3600
180	3000	0,314	3480	0,364	4942	0,517	78	85	180	110	120	153	75	3	3000
205	4000	0,419	4640	0,486	6589	0,690	85	92	205	120	130	165	80	5	3000
226	5900	0,618	6844	0,717	9718	1,018	100	10	226	140	155	205	100	5	2800
266	9800	1,026	11368	1,190	16143	1,690	120	135	266	170	190	228	110	8	2600
295	15500	1,623	17980	1,883	25532	2,673	138	150	295	195	215	258	125	8	2500
325	19500	2,042	22620	2,369	32120	3,363	155	165	325	220	235	290	140	10	2500
365	28900	3,026	33524	3,510	47604	4,985	170	180	365	240	255	330	160	10	2000
415	48200	5,047	55912	5,855	79395	8,314	205	220	415	290	310	415	200	15	2000
455	76800	8,042	89088	9,329	126505	13,247	225	240	455	315	340	475	230	15	1500
510	110000	11,518	127600	13,361	181192	18,973	250	275	510	350	390	515	250	15	1500